



*Standing Seam VMZinc™ Anthra*

# STANDING SEAM

## ARCHITECTURAL PANELS



- Original architectural seamed profile
- Single or double seam
- Variable tray widths
- Cut to length daily
- Various materials available



*Standing Seam VMZinc™ Anthra*


## Standing Seam

Standing Seam is available in single or double seams and can be used for facade or roofing.

With its thin rib and wide tray, it gives a modern appearance using concealed fixing and crimping techniques to lap panels along entire lengths.

The support needs to be ventilated rigid and continuous where all parts of the standing seam panels are laid.

The plywood minimum thickness shall be 15mm for wall cladding and 18mm for roofing. Standing Seam panels are fixed with steel clips every 600mm maximum centres.

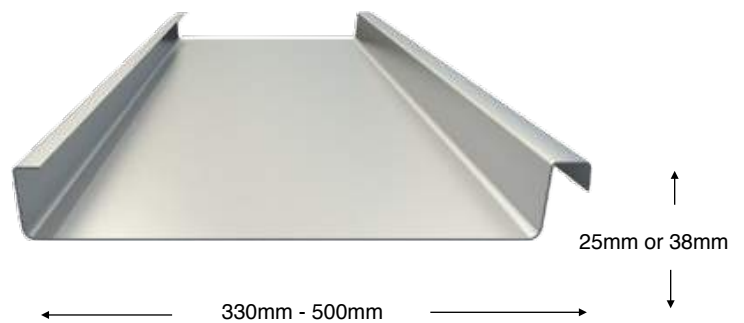

**CLASSIC - TIMELESS - THE ORIGINAL ARCHITECTURAL PROFILE.**

**PHONE 1300 742 011 - EMAIL: [APS@NO1ROOFING.COM.AU](mailto:APS@NO1ROOFING.COM.AU) - [WWW.NO1ROOFING.COM.AU](http://WWW.NO1ROOFING.COM.AU)**