



extend your outdoor lifestyle



scan this
QR code
for more info

laserlite.com.au



only Laserlite[®] has the technology

Laserlite[®] is the only polycarbonate corrugated sheet product in Australia featuring Advanced Weatherguard[™] technology, a special protective material that is warranted to:

- Extend the life of the sheet by up to 50%[#]
- Maintain sheet colour and clarity up to 50% longer[#]
- Provide 99.9% protection from UV rays up to 50% longer[#]
- Resist 25% larger hailstones[#]

With unrivalled technology and superior performance, it's clear why Laserlite[®] is part of the Australian outdoor lifestyle.

Comfort Cool[™] keeps you cool and comfortable.

Laserlite[®] 3000 is the only polycarbonate roofing product to feature Comfort Cool[™] Technology, special properties in the sheet that reflect the warming effect of the sun's rays to offer:


- Up to 50% better heat reduction than standard corrugated sheet[#]
- Reduced glare for ultimate comfort

[#] As compared to some other polycarbonate corrugated sheet products.




How it works

UV rays, wind, hail and rain have the potential to make polycarbonate resins brittle and lose colour over time. Advanced Weatherguard[™] protects the sheet and protects from harmful UV radiation.

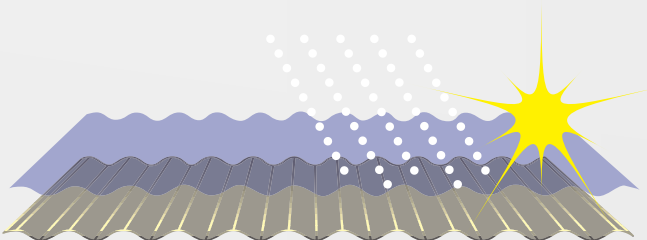

How it works

Infrared light emitted by the sun passes through polycarbonate sheet making it warm underneath. Comfort Cool[™] Technology reflects the heat away whilst letting visible light through with less glare.

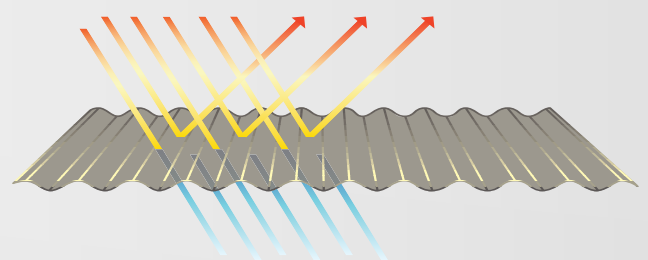

Performance & Reliability



Light level

MORE LIGHT

clear

opal

cream bronze tint

grey tint

Comfort level

WARMER

clear

bronze tint

grey tint

opal

cream

Ultimate Comfort



Light level

MORE LIGHT

frost

platinum

Comfort level






WARMER

frost gun metal platinum

Handling, Storage and Cleaning

Store sheets on a flat surface in a well protected and shaded area, out of direct sunlight. Stacked sheets stored in the sun will cause heat build-up. Do not come in contact with chemicals, paints, solvents and sealants that are incompatible with Polycarbonate. Clean regularly with warm, soapy water and a soft cloth. Do not use petrol, ketones, acetone, phenols, chlorinated and aromatic hydrocarbons, petroleum-based paints, abrasive cleaners and solvents. Refer to website for more information.

The classic, high performing Laserlite® range.

						
		clear	opal	cream	bronze	grey
Light Transmission	%	93%	49%	43%	38%	19%
Heat Reduction	% [‡]	0%	52%	62%	33%	47%

Lengths Available

1.8m, 2.4m, 3.0m, 3.6m, 4.2m 4.8m, 5.4m, 6.0m, 7.2m, 9.0m

LESS LIGHT



corrugated

greca




5 rib

Sheet Width	840mm	810mm	830mm
Cover Width	755mm	765nn	762mm

COOLER

Technologically advanced heat reflective range.

Up to 50%
better heat
reduction
performance
than standard
corrugated
sheet!#

				
		platinum	frost	gun metal
Light Transmission	%	16%	47%	16%
Heat Reduction	% [‡]	69%	63%	66%

Lengths Available

1.8m, 2.4m, 3.0m, 3.6m, 4.2m, 4.8m, 5.4m, 6.0m, 7.2m, 9.0m

LESS LIGHT



corrugated

greca

Sheet Width	840mm	810mm
Cover Width	755mm	765nn

COOLER


[‡]Based on the warming effect of the sun's rays through a sheet vs 3mm float glass (300-2500nm). #As compared to some other polycarbonate corrugated sheet products.

up, and possibly distortion, even if covered. Prevent Moisture getting between stored sheets as this may cause whitening or discolouration. Avoid soft sponge or soft brush. Rinse thoroughly. Do NOT remove sheets to clean once installed. Laserlite® is affected by methylated spirits, benzene, website for more details.

Installation Guide

Step 1

Purlins & Accessories

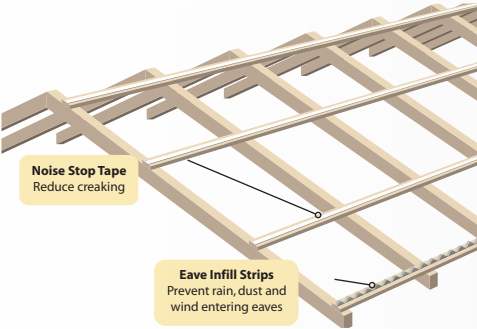

1. Ensure that your roof pitch is at least 5°, i.e.. 88mm rise per lineal metre. This will ensure adequate water run off.



2. Allow for ventilation, particularly at the highest point, to minimise heat build-up and provide air circulation. Good ventilation will also minimise condensation in cold weather.

3. For roofing, purlin/batten spacings should be no more than those shown in Table X - Maximum Purlin Spacings. For curved structures, the maximum purlin spacing should be 750mm and a minimum radius of 4000mm for Corrugated and Greca profile and 14000mm for 5 Rib profile. For walls, nogging spacings should be no more than 1200mm. Use Laserlite® Noise Stop Tape on all battens, purlins or noggings to minimise the noises associated with expansion and contraction.

4. Lay Laserlite® Noise Stop Tape to avoid creaking.

5. Lay Laserlite® Eave Infill Strips at eaves to avoid rain, dust & wind entering the eaves.


6. For installations under a gutter, fit metal back channel with Back Channel Infill Strips prior to laying sheet.

Table X - Maximum Purlin Spacings

Profile	End Span	Mid Span
Corrugated	800mm	1000mm
Greca	900mm	1200mm
5 Rib	900mm	1200mm

Step 2

Sheet & fixings

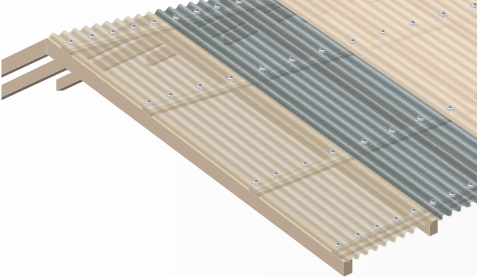


1. Ensure that the UV surface protected side faces the sun. This is the side of the label and the inkjet marking. When installed as a wall or fence it is recommended that the UV protected side is facing the most sun. The life of the sheet may be shortened and discolouration may occur due to the unprotected side being exposed to UV radiation.

2. The sheet can be easily cut with a pair of shears, a fine-toothed handsaw or a circular saw with a cut-off blade suitable for plastic.

3. For roof laying, start with the lower sheets first, keeping side laps away from prevailing wind. Allow an overhang of 50mm. Temperature changes will cause expansion and contraction, so make allowances for thermal movement. Resistance to movement can cause buckling.

4. Side laps will differ by profile. Install as shown below:

Table Y - Side laps

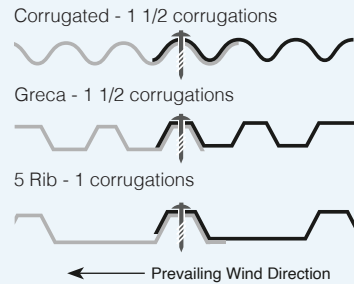

5. To ensure maximum performance of the sheet, and to avoid buckling, it is necessary to oversize the holes and centre the fixings. It is recommended that Laserlite® OneShot® fixings are used. They come complete with their own hole saw that cuts an expansion hole as you drill. The screw is centred every time and the cutter holds the plug of material removed. If using Laserlite® Standard Fixings, pre-drill your fixing holes. Use a 10mm drill for sheets up to 4.2m long and a 12mm drill for sheets longer than 4.2m. Fix the sheet through the centre of the pre-drilled holes, perpendicular to the purlins/battens. A (5/16") Drill hex driver bit should be used. Only tighten the fixings enough to prevent rattling. Over tightening may cause distortion and undue stress with possible failure resulting. Use only Laserlite® branded fixings as these are designed to be compatible with Laserlite® Polycarbonate Roofing. **Any failure of the sheet due to fixings other than Laserlite® branded will void the Laserlite® warranty.**

In normal conditions, use the fixing spacings shown in Table Z - Fixing spacings. As a guide, you will need approximately 7 fixings per lineal metre. This depends on your purlin spacings and wind conditions. In high wind areas fix Corrugated and Greca on every second corrugation and 5 Rib on every second crest. It is suggested that barge capping be used. Fix the sheet through the valleys for walls with Laserlite® Standard Fixings.

Table Z - Fixing Spacing

Profile	End Purlin	Mid Purlins
Corrugated	every 2nd crest	every 3rd crest
Greca	every 2nd crest	every 3rd crest
5 Rib	every crest	every crest

Using OneShot® fixings eliminates requirement for pre-drilling.

6. End overlaps should be 150mm for steep pitch or 200mm for shallow pitch.

Step 3



Capping & Flashings for various installations

APEX ROOF - Fit metal barge capping* to the edge of sheet and metal ridge capping to the apex.



UNDER A GUTTER - Fit back channel flashing with foam infill strips under gutter prior to laying sheets and metal barge capping to edge of sheet.



AGAINST A WALL/FASCIA - Fit metal barge capping to edge of sheet and metal apron flashing at the wall or fascia.


Safety Recommendations

- Always exercise extreme care when walking on a roof.
- Never walk on or apply your load directly to sheeting.
- In particular consider all safety requirements when working at heights above 2m.
- For safety reasons we recommend the use of safety mesh for installations above 3m.
- Use appropriate personal protective equipment (PPE) such as safety footwear, glasses and gloves.
- All safety practices must comply with the applicable local building and/or work cover code(s).
- We do not recommend the collection of drinking water from any roof without appropriate precautions and filtration. Check with your local water authority for further advice.


CAUTION: To maximise the life cycle of your Laserlite® roofing, Laserlite® recommends avoiding exposure of polycarbonate sheeting to excess heat from patio heaters. Maintain a distance of 1 metre minimum between the sheets and the heater with adequate ventilation at all times and temperature to below 90°C beneath the sheeting. If the temperature rises above 90°C, remove the heater immediately.



- 1 Noise stop tape
Reduces creaking
- 2 Eave infill strips
Prevents rain, dust and wind entering the eaves



- 3 Barge capping†
Prevents wind & rain entering the gable ends
- 4 Ridge capping†
Prevents roof leaking at apex




Easy to install, Laserlite® has a quality range of accessories to ensure a professional finish.

When installed against a wall

Back channel & infill Prevents leaking at walls and fascias




Apron flashing† Prevents leaking at walls and fascias



Laserlite® OneShot® Time Saving Fixing System saves 50% installation time as no pre-drilling is required. They also feature a Class 4 coating for superior corrosion resistance and suitability for coastal areas.



ONE SHOT®
Laserlite Fixing System

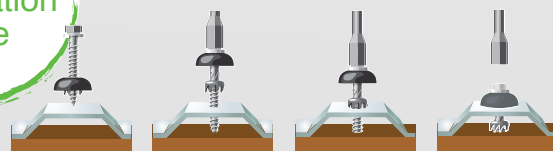

Distributed by:



no1roofing.com.au

Narrabeen • Regents Park • Mona Vale • Seven Hills
• Prestons • Caringbah • Somersby • Port Macquarie

Manufactured by:



*For Warranty details, refer to our website laserlite.com.au. Colours depicted in this brochure are representations offered only as a guide and should not form the basis of a colour selection. Slight colour variation may occur between production runs. Transmitted light and colour may vary in intensity depending on weather conditions. The information contained in this brochure is to the best of our knowledge accurate, but all recommendations are made without any warranty whatsoever, since the conditions of use are beyond our control. This brochure cancels and supersedes all previous publicised information. The company reserves the right to alter and revise, without notice the information contained herein. †Apron flashing, Barge and Ridge capping not stocked.