



smart & modern design




scan this
QR code
for more info




laserlite.com.au

The Glazing System Explained

The H-Bar system makes handling and installation easy and flexible. The **Laserlite® Multiwall** sheets simply slot into the H-Bar ready for fixing to the structure. The glazing bar system allows for thermal expansion and eliminates the need for penetrations through the sheet, making the structure watertight.

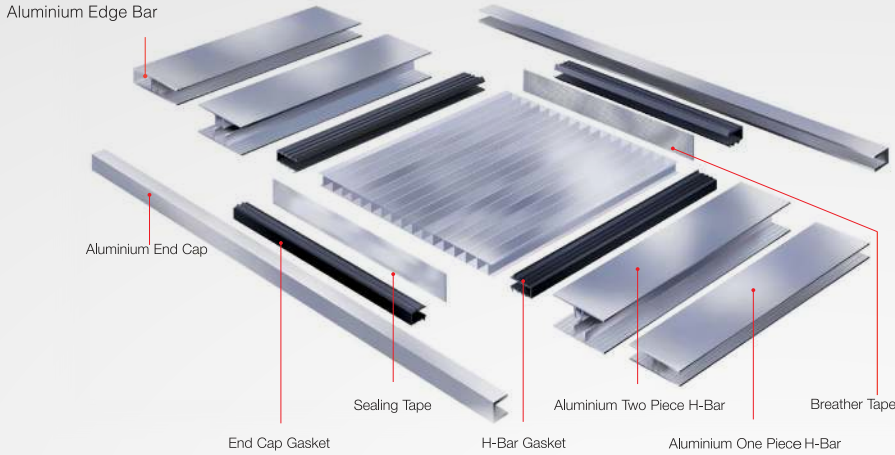

GAUGE 10mm



Standard Width Standard Lengths (M)

700mm	2.0	2.5	3.0	3.5	4.0	4.5	5.0	7.0
1050mm	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5
	6.0	6.5	7.0	7.5	8.0	8.5	9.0	

Standard Colours

Clear, Bronze Tint, Grey Tint, Platinum, Opal

Sheet Weight


1.7 kg/m²

Other colours, gauges, widths and lengths available. Lead times and minimum order quantities may apply.

Accessories


Aluminium One Piece H-Bar

Standard Colours: Anodised, Mill, Black, White
Standard Length: 6m
Easy slot in installation.
Recommended for high wind areas.




Aluminium Two Piece H-Bar

Standard Colours: Anodised, Mill, Black, White
Standard Length: 6m
Join and Cover edges of Multiwall sheets.
Enables ease of sheet replacement.




Aluminium Edge Bar

Standard Colours: Anodised, Mill, Black, White
Standard Length: 6m
Easy slot in installation.
Use to start and finish H-Bar assembly.




Aluminium End Cap

Standard Colours: Anodised, Mill, Black, White
Standard Length: 6.5m
Cover ends of Laserlite® Multiwall sheets.
To be used in conjunction with End Cap Gasket.




End Cap Gasket

Colour: Black
Standard Gauges: 10mm
Standard Length: 10m rolls
Seal and secure ends of Laserlite® Multiwall sheets.
To be used in conjunction with Aluminium End Cap.




H-Bar Gasket

Colour: Black
Standard Gauges: 10mm
Standard Length: 20m rolls
Seal and secure edges of Laserlite® Multiwall sheets.
To be used in conjunction with H-Bars and Edge Bars.




Breather Tape

Length: 33m
Allow ventilation and reduce condensation.



Sealing Tape

Length: 50m
Prevent moisture and dust from entering Laserlite® Multiwall flutes.



Laserlite® Multiwall Data

	Clear	Grey Tint	Bronze Tint	Opal	Platinum
Light Transmission	86%	9%	22%	16%	11%
Heat Transmission	76%	24%	30%	29%	16%
Solar Heat Gain	0.789	0.473	0.516	0.343	0.327
Shading Coefficient	0.907	0.544	0.593	0.394	0.376

Please refer to the Laserlite® website laserlite.com.au for full details on: 15 Year Product Warranty, Installation and Safety and Product Technical Data.

Colours depicted in this brochure are representations offered as a guide only and should not form the basis of a colour selection. Slight colour variation may occur between production runs. Transmitted light and colour may vary in intensity depending on weather conditions. The information contained in this brochure is to the best of our knowledge accurate but all recommendations are made without any warranty whatsoever, since the conditions of use are beyond our control. This brochure cancels and supersedes all previous publicised information. The company reserves the right to alter and revise, without notice, the information contained herein.

Distributed by:

Imported by:

no1roofing.com.au

Narrabeen • Regents Park • Mona Vale • Seven Hills
• Prestons • Caringbah • Somersby • Port Macquarie

LASERLITE
BUILDING PRODUCTS