


### Profile Drawing

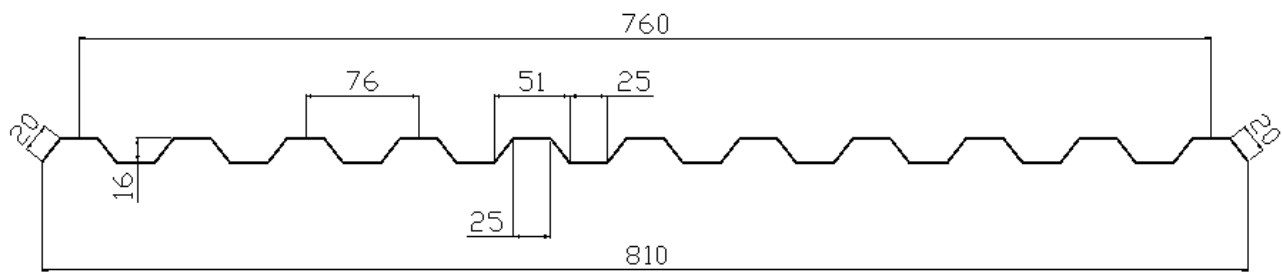

### Profile Dimensions

Profile (mm)	Thickness (mm)	Length (m)	Overall width (mm)	Cover Width (mm)	Side-Lap (%)
76/16	0.8	1.8-7.2	810	760	6.2

### Load / Span Data

Maximum Purlin Span		
Load/Kpa	Mid Span (mm)	End Span (mm)
1	1200	900
1.5	800	600
2	700	525


For high wind areas, please contact our local office for further support.

- The specified dimensions do not supersede the requirements of local construction codes.
- The given spans are according to deflections criterion of  $L/20$ , and minimum slope of  $5^\circ$ .
- The maximum roof spans are based on calculation model and practical testing.
- The mentioned load refers to wind and snow load only.

For vertical application spans can be increased by 10%.

### Panel Length

- Maximum recommended panel length – 7.2 m.
- Recommended longitude overlap of 200mm above purlin.
- Each panel to extend 100mm over the fixings line on the purlin.
- Panels should overhang Min. 50mm to Max. 150mm beyond the last screw fixings line.

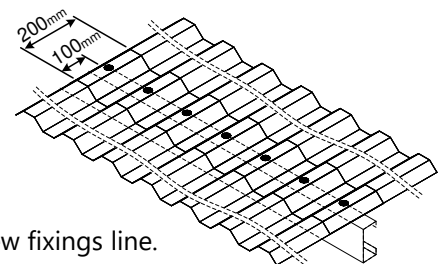

### Curved Roof

- Minimum curving radius 4.0 m.



### Positioning

- Make sure the UV protected side faces out.
- Apply noise stop (purlin tape) on all purlins.
- Apply one corrugation side-lap.
- Two corrugations side-lap is recommended for low roof slope and/or high wind areas.
- Side-lap of SUNTUF panels should be installed against the primary direction of rain.
- The SUNTUF panels should be located and installed without any stresses.

Do not pull, stretch or force SUNTUF panels while positioning and installing.




### Fastening

- **in case of NOT using** Clearfix or One-shot screws, Pre-drill 10mm holes at crests where screws are positioned.
- Start fastening the screws from the first lateral corrugation through the pre-drilled holes.
- Start fastening the screws on the lower edge purlin (End-lap), through every other corrugation crest (1).
- Fasten screws at the internal purlins, as shown in drawing (2), starting at the same side.
- Fasten screws at the upper edge purlin, through every other corrugation crest, starting at the same side (1).
- **Do not over-tighten!**




### Fastening Location

#### 1) Edge Purlins Fixing




#### 2) Internal Purlins Fixing




#### Screws and Washers Specification

- Crest fixing: Self-drilling Clearfix screw 50mm x 14g.




Clearfix Screw Screw

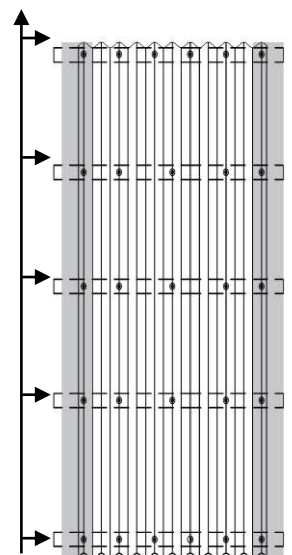

### Important Notes

- Use only PALRAM approved accessories, including EPDM rubber washers, silicones, sealing tape, closure fixtures etc.
- Apply noise stop (purlin tape) on all purlins.




### Cutting Tips

- Use jigsaw or circular saw with fine tooth blades.
- Apply high blade speed with moderate feeding rate.
- Support the sheets near the cutting line.
- Clean the dust and cutting chips after cutting.



### Fastening Tips

- Use adjustable electric screwdriver.
- The screw must be installed perpendicular to the SUNTUF sheet.
- **Important: Do not over-tighten.**




### Safety

- Do not step directly on the panel.
- Use stepping boards.
- Work according to local safety regulations codes.



### Handling and Storage

- Store in a dry shaded place, protect from direct sunlight and rain.
- Avoid covering the sheets with heat absorbing materials.
- Avoid contact or environment of chemicals.
- Protect the sheets from any physical damage.



Inasmuch as PALRAM Industries has no control over the use to which others may put the material, it does not guarantee that the same results as those described herein will be obtained. Each user of the material should make his own tests to determine the material's suitability for his own particular use. Statements concerning possible or suggested uses of the materials described herein are not to be construed as constituting a license under any PALRAM Industries patent covering such use or as recommendations for use of such materials in the infringement of any patent. PALRAM Industries or its distributors cannot be held responsible for any losses incurred through incorrect installation of the material. In accordance with our company policy of continual product development you are advised to check with your local PALRAM Industries supplier to ensure that you have obtained the most up to date information.